LASPM - SUCTION LANCES

Data Sheet

FEATURES

- Suction lance with valve and foot filter for PRIUS pumps from 250 to 1000 l/h
- Level probe sold separately
- Contact N.O.
- BNC connector
- Bottom filter
- Adjustable height
- 1 1/2 "fitting
- 1 1/2 "bottom filter
- PVC body
- Up to 2 suction outlets available

LASPM
1 OUTPUT



LASPM
2 OUTPUTS

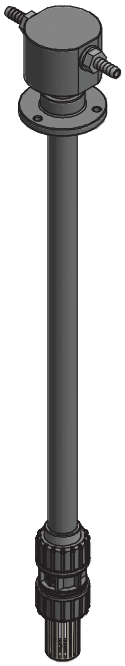

SPECS

L	A	S	P	M	V	0	7	5	5	1	U	0	3	,	5	5	0	0	0

O-RING	
V	FKM B
D	Ethylene Propylene

LENGTH cm	
075	75
108	108
122	122

HOSE FITTINGS	
5	3/4″ D.13
B	3/4″ D.18
M	D.32

OUTPUTS (suction)	
1	1
2	2

LEVEL - CONTACT - CONNECTOR TYPE	
0	level - contact N.O. - BNC
4	without level

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec
SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0

LASPM - SUCTION LANCES

Data Sheet

MEASURES

EFFECTIVE LENGTH	TANK VOLUME
75 cm	250 lt (mod. CNT PD 250)
108 cm	500 lt (mod. CNT PD 500)
122 CM	1000 lt (mod. CNT PD 1000)

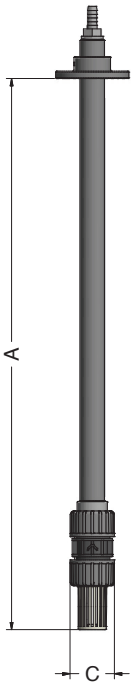



LASPM 1		
A (mm)	B	C
750	100	60
1080		
1220		

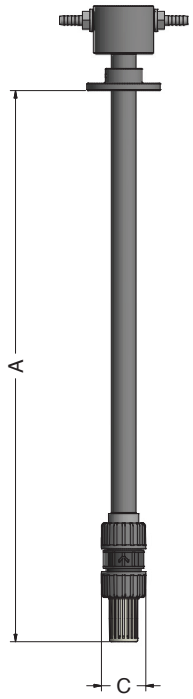



LASPM 2		
A	B	C
750	100	60
1080		
1220		

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0