LASP M - Suction Lances

Data Sheet

FEATURES

- Suction lances for PRIUS pump from 250 to 500 l/h
- Level switch
- N.O. contact
- BNC connector
- Foot valve
- Adjustable height
- 1 1/2" fitting
- 1 1/1" foot filter
- PVC body
- Up to 2 suction input available

1 suction input



2 suction input

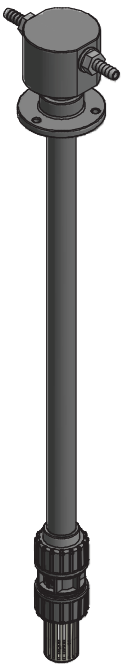

SPECIFICATIONS

L	A	S	P	M	V	0	7	5	5	1	U	0	3	,	5	5	0	0	0

INPUTS (suction)	
1	1
2	2

LEVEL - CONTACT - CONNECTOR	
0	Level - N.O. contact - BNC
4	without level

FITTING AND HOSE	
5	3/4" D.13
B	3/4" D.18
M	D.32

LENGTH cm	
075	75
108	108
122	122

O-RING	
V	FKM B
D	Ethylene Propylene

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

emec SIMPLE AS WATER

Specifications subject to change without notice | R11-19

qualityaustria SYSTEM CERTIFIED
ISO 9001:2015
ISO 14001:2015
BS OHSAS 18001:2007

LASP M - Suction Lances

Data Sheet

DIMENSIONS

OPERATING LENGHT	TANK VOLUME
75 cm	250 lt (mod. CNT PD 250)
108 cm	500 lt (mod. CNT PD 500)
122 CM	1000 lt (mod. CNT PD 1000)

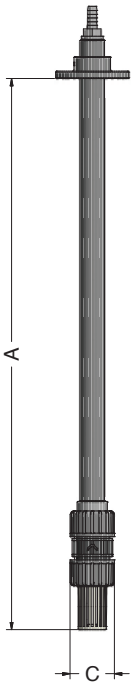



LASPM 1		
A (mm)	B	C
750	100	60
1080		
1220		

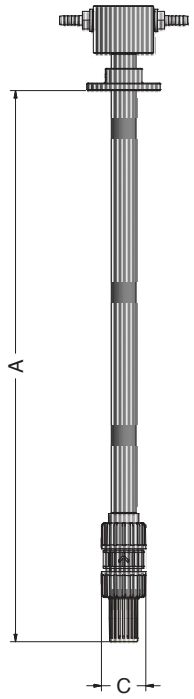



LASPM 2		
A	B	C
750	100	60
1080		
1220		

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R11-19

emec SIMPLE AS WATER

qualityaustria SYSTEM CERTIFIED
ISO 9001:2015
ISO 14001:2015
BS OHSAS 18001:2007